

This curb and gutter detail shall be used when there is a gap between the existing pavement and the proposed curb and gutter.

The locations of Combination Concrete Curb and Gutter shall be marked by the Engineer in the field.

The Combination Concrete Curb and Gutter shall be placed and include any and all joints, reinforcement, joint fillers and subbase granular


The area between the edge of the existing pavement and the face of the new gutter shall be cleaned of all loose material and filled with Class PV concrete to a maximum of 1' width.

The cost of the additional concrete shall be included in the cost of the Combination Concrete Curb and Gutter, Type B-6.12.

See Specifications for additional requirements.

APPROXIMATE LOCATIONS

STA 107+80 TO STA 108+75 (LT, NORTH AV. INTERSECTION) STA 115+00 TO STA 115+22 (LT, MORSE AV. INTERSECTION) STA 115+31 TO STA 115+80 (RT) STA 119+55 TO STA 119+82 (RT)

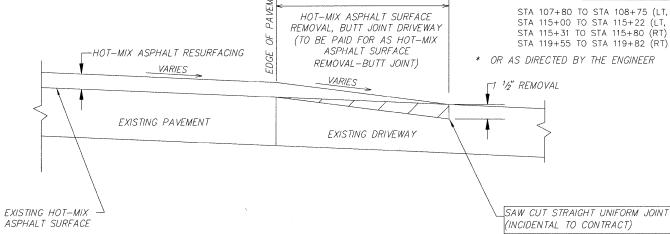

* OR AS DIRECTED BY THE ENGINEER


HOT-MIX ASPHALT SURFACE REMOVAL-DRIVEWAY BUTT JOINT DETAIL

*4'

SEC Group, Inc. USER NAME = jmelhuish DESIGNED REVISED FILE NAME = 090196-det-trench.dgn DRAWN REVISED CHECKED REVISED PLOT SCALE = PLOT DATE = 8/31/2009 DATE - 8/3/09 REVISED

STATE OF ILLINOIS

SECTION COUNTY **DETAILS** 2537 09-00084-00-RS COOK 53 29 **NORTH OAK AVENUE** CONTRACT NO. SCALE: SHEET NO. 1 OF 1 SHEETS STA. TO STA. FED. ROAD DIST. NO. | ILLINOIS FED. AID PROJECT ARA-9003 (345)

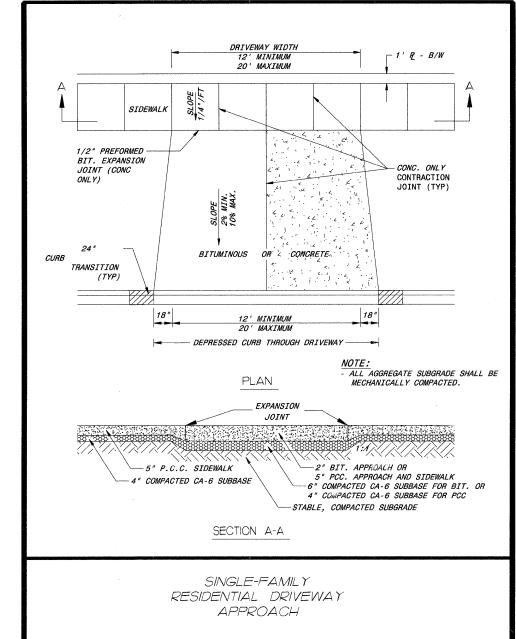

DEPARTMENT OF TRANSPORTATION